



- Flow Measurement
- Level Transmission
- Data Logging
- IEEE 754 Precision Accuracy
- 5 Minute Programming

VANTAGE 2200

Ultrasonic Open Channel Flow & Level Meter


VANTAGE 2200

EASTECH COMBINES FLOW MEASUREMENT, LEVEL TRANSMISSION AND DATA LOGGING WITH IEEE 754 PRECISION ACCURACY AND 5 MINUTE PROGRAMMING

The Vantage 2200 is an advanced microprocessor-based ultrasonic transmitter utilized for extremely accurate measurement of both liquid level and flow in open channels. Each unit is equipped with an internal data logger that provides for on-screen display of maximum, minimum and average daily flows. More than 70 standard flow equations for flumes, weirs and open flow nozzles are stored in non-volatile memory. Dual sensors can be input to a single set of electronics for dual weir/flume or bar screen level applications. The Vantage 2200 is designed to be extremely user-friendly with an easy to read 20 character alphanumeric, self-prompting display and a menu-driven programming guide.

FLOW

The Vantage 2200 is pre-programmed at the factory for specific customer applications. If on-site calibration is required, more than 70 standard flow equations for flumes, weirs and open flow nozzles are stored in non-volatile memory. For non-standard applications, a site specific H/Q table may be entered through the 16 button keypad.

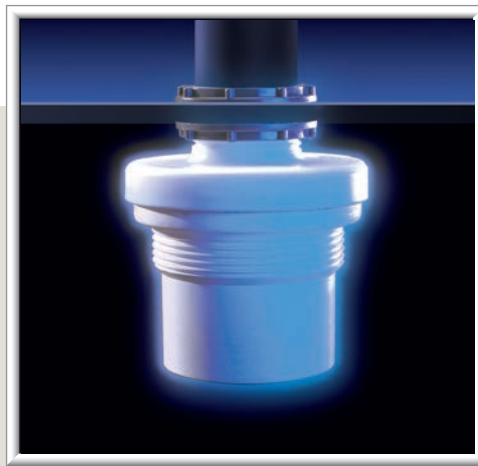

LEVEL

When utilized strictly for level measurement, the Vantage 2200 will accurately measure fluid levels in ranges up to 50 feet. Initial programming is simply accomplished through self-prompting displays assisted by menu-driven programming guides.

APPLICATIONS

- ▶ Plant Influent
- ▶ Plant Effluent
- ▶ Dual Channel Measurement

The FB2 and FB5 sensor heads are both capable of withstanding indefinite submergence. The transmitter portion of the 2200 is FM approved for Nema 4, 4X environments and is equipped as standard with an integrated data logger. Flow data may be accessed through a comprehensive selection of electronic outputs: 4-20mA, programmable relays, RS232 / 485, Modbus®, Profibus® and DeviceNet®.



APPLICATIONS

- Level Measurement ◀
- Differential Level Measurement ◀
- Dual Channel Measurement ◀
- Pump Alternation ◀

Sensing heads are available in Tefzel®, PVC or glass- filled polyester epoxy and are accurate to within ± 0.02 inches. Both the sensing and transmitter portion of the Vantage 2200 are warranted for a period of 18 months. Each unit is equipped with gas discharge arrestors and EMI/RFI filtering to prevent failure due to lightning and power surges.

ACCURACY 0.02"

The Open Channel Flowmeter that can pay for itself in one week

The overall accuracy of an ultrasonic open channel flowmeter is dependent upon conversion of level measurement to flow. The more accurate the conversion, the more accurate the flow data. **A 10% error in level measurement can result in a 25% error in flow measurement.**

Since the Vantage 2200 employs IEEE 754 single floating point precision in all of its computations, an error of less than 0.0000005% is introduced during the level to flow conversion.

When billing customers for treatment services, the accuracy of the flow information obtained directly translates into dollars. Since level accuracy statements from most open channel flowmeter manufacturers will vary from .02" to .25", it is extremely important to study these statements in order to determine the best suited product for the intended application.

COMPARATIVE COST ANALYSIS (0.25" vs 0.02")

| 18" PARSHALL FLUME WITH 3" HEAD RISE | |
|---|--|
| $Q = K \times H^{(X)}$ <p style="text-align: center;"> FLOW = COEFFICIENT FACTOR x HEAD RISE (ft) POWER FACTOR </p> | |
| FLOWMETER Accuracy: 0.25 inches | VANTAGE 2200 Accuracy: 0.02 inches |
| $Q = K \times H^{(X)}$ $Q = 6 \times 0.229^{(1.538)}$ $Q = 0.6258 \text{ cu. ft./sec.}$ $Q = 281 \text{ GPM}$ | $Q = K \times H^{(X)}$ $Q = 6 \times 0.248^{(1.538)}$ $Q = 0.7044 \text{ cu. ft./sec.}$ $Q = 316 \text{ GPM}$ |
| A Level Error of 0.25" (8.3%) Results in a 12.5% Flow Error | A Level Error of 0.02" (0.67%) Results in a 1.25% Flow Error |

At the national average billing rate of \$2.61/1000 gal., an 11.25% (12.5% - 1.25%) flow error differential in a 1MGD plant translates to 112,500 gallons/day or 787,500 gallons/week of unbilled revenue (\$2,055/week). The higher accuracy of the Vantage 2200 has the potential to pay for itself within the first week of operation while adding \$106,880/year to the plant's revenue stream.

As can be seen from the tables below, a 10% error in level measurement can result in a 25% error in flow measurement. The tables also verify that a meter with an accuracy statement of 0.25 inches will not provide the needed accuracy for billing or NPDES permit requirements—especially when coupled with normally accepted flume and weir accuracies of 3 to 5%.

18 Inch Parshall Flume

| Flume Head Rise | Accuracy 0.02 inches | | Accuracy 0.04 inches | | Accuracy 0.25 inches | |
|-----------------|----------------------|------------|----------------------|------------|----------------------|------------|
| | Level Error | Flow Error | Level Error | Flow Error | Level Error | Flow Error |
| 3 inches | 0.67% | 1.25% | 1.3% | 2.9% | 8.3 % | 12.5% |
| 6 inches | 0.33% | 0.54% | 0.67% | 1.0% | 4.15% | 6.26% |
| 9 inches | 0.22% | 0.35% | 0.44% | 0.69% | 2.05% | 4.16% |

60 Degree V-Notch Weir

| Weir Head Rise | Accuracy 0.02 inches | | Accuracy 0.04 inches | | Accuracy 0.25 inches | |
|----------------|----------------------|------------|----------------------|------------|----------------------|------------|
| | Level Error | Flow Error | Level Error | Flow Error | Level Error | Flow Error |
| 2 inches | 1.0% | 3.59% | 2.0% | 5.19% | 12.5% | 32.8% |
| 4 inches | 0.5% | 1.25% | 1.0% | 2.5% | 6.25% | 15.6% |
| 8 inches | 0.25% | 0.64% | 0.5% | 1.28% | 3.13% | 7.66% |

APPLICATIONS

FLOW & LEVEL



The electronics of the 2200 is extremely versatile and can be programmed for flow (using weirs/flumes or any special H/Q function) or level measurement of up to 50 feet. Four sensors are available. The FB2 and FB5 sensors are capable of measuring flow or level from 16/25 feet. The FB3 is a glass-filled polyester sensor with an extended level range of 0-50 feet.

FLOW

The following is a partial list of the stored flow to primary element functions.

- ▶ Parshall flumes
- ▶ Manhole flumes
- ▶ Palmer Bowlus flumes
- ▶ Trapezoidal flumes
- ▶ H flumes
- ▶ V Notch weirs
- ▶ Contracted weirs
- ▶ Suppressed weirs
- ▶ Cipoletti weirs
- ▶ Open flow nozzles
- ▶ Kennison nozzles
- ▶ Mannings circular
- ▶ Mannings rectangular
- ▶ Special H/Q

LEVEL

Level measurement can be programmed in the 2200 for a range of 0-50 feet. Vertical rectangular and cylindrical or horizontal cylindrical vessels are typical applications.

DUAL SENSORS




Dual sensors may be used with the Vantage 2200 electronics. Individual display functions are provided for each sensor. This allows for two separate measurements within a single meter.

Typical arrangements are:


Dual Sensors

Dual weirs or flumes or flow for flume/weir and level. Sensors may be programmed identically or with different calibration variables.

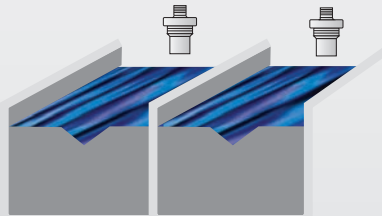


Bar Screen Level Differential

This will alert the operator to a clogged bar screen through the use of a specific alarm assigned to one of the relays. The difference between level 1 and level 2 will be displayed.

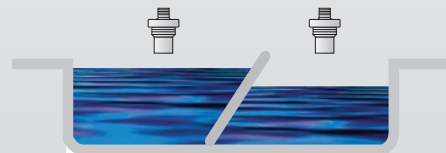


Compound Weirs

Programming dual sensors for a compound weir will allow for greater accuracy over the entire flow range.



PUMP ALTERNATION

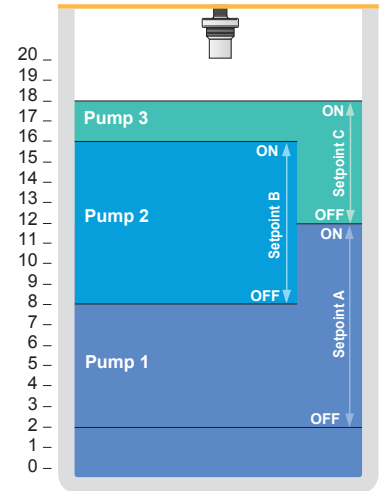

The pump alternation feature of the Vantage 2200 is utilized when the treatment facility has more than two pumps that are to be actuated based upon level set points.


For example: a sewer line will feed into a wet well at a lift station. The station employs three pumps. The wet well is 20 feet deep. As the wet well fills, the operator wants to turn on the pump (Pump 1) when the level reaches 12 feet and off at 2 feet. If the level in the well continues to rise with only one pump running, the operator will probably require the second pump (Pump 2) to come on at a level of 16 feet and off at 8 feet. If the level in the well continues to rise with both pumps running, the operator will initiate a third pump (Pump 3) to come on at a level of 18 feet and off at 12 feet.

There are three setpoints: on at 12 feet, off at 2 feet (Setpoint A); on at 16 feet, off at 8 feet (Setpoint B); on at 18 feet, off at 12 feet (Setpoint C).

With the pump alternation feature, the setpoints in the 2200 are not assigned to a specific relay controlling a specific pump. The 2200 tracks each time a relay is activated, and when a setpoint is reached, the relay with the least number of activations is tripped. **WITH THIS FEATURE, ALL THREE PUMPS WILL EXPERIENCE EVEN WEAR.**

The pump alternation feature may also be employed on filling applications—such as a water tank fed by multiple pumps.

PROGRAMMING

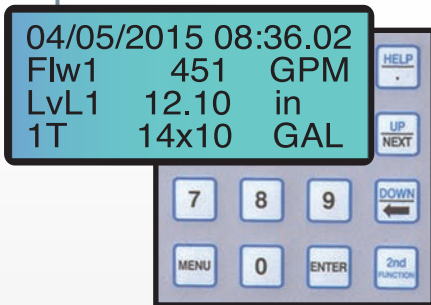

5 Minute Field Programming

The Vantage 2200 utilizes a self-prompting display that allows for 5 minute programming of standard applications and 15 minute programming of in-depth data logging applications and auxiliary outputs. The menu driven programming feature allows the user to read the display status, log values, and calibrate the 2200 with a drill down type menu structure.


Up to 78 primary element functions for weirs and flumes are stored by size and name with the added capability of entering special H/Q curves by flow (in engineering units). All flow calculations are displayed as actual primary elements, not as power function. Mounting dimensions for the sensor are displayed for each application.

The microprocessor-based electronics can be programmed to allow customer selection of tank shape or flow functions. The following is standard: Parshall flume, Manhole™ flume, Lagco flume, V-Notch weir, open flow nozzle as well as Manning's equation. Special flumes can be programmed in the field by following a simple setup procedure.

A 16 button keypad drives the menu section. Outputs are 4-20 mA, 5 programmable relays, RS-232 serial port (allows for real-time communications operating in a Modbus® protocol) and a separate RS-485 port. Profibus® and DeviceNet® communication protocols are also available.

Flash memory is employed for logging flow data. Data is retrieved by viewing the local display or downloaded via the serial port.

DATA LOGGING

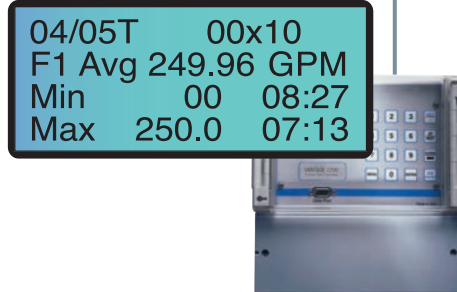


The Vantage 2200 has a 32K Byte logger with storage intervals. The logger can be programmed for various time intervals. Up to 8 channels can be logged, including flow, level setpoints, and totals for one or two sensors.

Daily Averages

Daily summary allows viewing of the previous eight days. This includes times, dates and totals.

Logger Graph

In addition, a bar graph may be visually displayed on the 2200. The graph will display the stored logger data in pre-programmed time intervals.

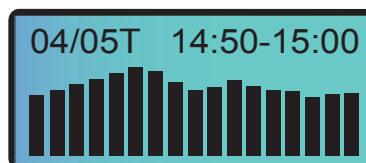


Data Retrieval


Logger data can be collected by using a laptop computer or an optional modem installed in the 2200 enclosure.



INFORMATION DISPLAY

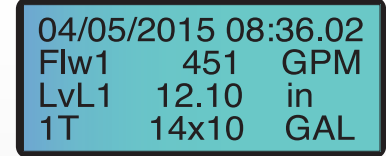

Page 1

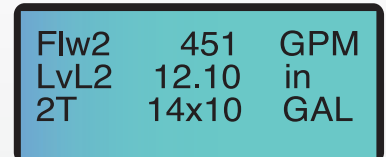

Page 2

The Vantage 2200 utilizes a 20 character four line backlit display. The main screen can be programmed to display up to eight lines of meter information such as flow 1 and/or flow 2 (for dual sensors), totals 1 and/or totals 2 (for dual sensors), level 1 and/or level 2 (for dual sensors), time, date and relay alarms. The order of display line information is programmed to user preference. The backlit display may be programmed to be ON or OFF, or to remain OFF during a selected time interval. Display contrast is fully adjustable.

The 2200 will display proper mounting distances for all programmed primary devices. Diagnostic information is retrieved via a menu-driven self-test program capable of isolating fault parameters such as: loss of signal, 4-20 mA loop failure, logger memory full, communications error, sensor fault and open transmitter cable connection.

DATA TRANSFER

MULTIPLE OUTPUTS

The Vantage 2200 is designed for reliable and accurate retrieval of data—either on-site or remotely. The unit is equipped, as standard, with an integrated data logger capable of storing large amounts of information for later analysis. Because of its multiple output capability, this information may simply be retrieved through the use of one of the following methods.

CURRENT OUTPUT

4-20 mA. Isolated, 1000 ohms maximum.

RELAY OUTPUTS

Five SPDT relays available for alarm conditions.

Relay assignments include:

- ▶ Setpoints: 1, 2 or 3; On and Off selectable for High or Low alarms.
- ▶ Lost signal: used when the sensor does not receive a signal.
- ▶ 4-20 mA Loop: The 4-20 circuit is monitored to detect open circuits.
- ▶ Overrange 1: Maximum level is exceeded.
- ▶ Overrange 2: Identical to overrange 1 for an optional second sensor.
- ▶ Contact Integrator: Assignable to multiplied values in order to pace external equipment.

- ▶ 4-20 mA
- ▶ 5 SPDT Relays
- ▶ RS232
- ▶ RS485
- ▶ Profibus
- ▶ DeviceNet



SERIAL OUTPUTS

RS-232: With Modbus protocol. Flow control is CTS/RTS or none. DB-9 connection.

RS-485: With Modbus protocol, Opto-Isolated. Terminal strip connection. The RS-232 & RS-485 can be set with different slave I.D.s.

Data Logging: Eight distinct channels are available to log. The storage capacity for a single channel @ 5 minute intervals is 113 days. IEEE floating point storage is used.

COMMUNICATION PROTOCOLS

Modbus®, Profibus® or DeviceNet®

INTEGRATED CHART RECORDER

A SINGLE NEMA 4, 4X UNIT INCORPORATING A CHART RECORDER, FLOWMETER AND DATALOGGER

- ▶ Fully Integrated Package
- ▶ Powered by Flowmeter
- ▶ User Selectable Output Ranges and Recording Times




| | |
|------------------|------------------------|
| Accuracy | .05% Full Scale |
| Power Source | 90/240 VAC, 50/60 Hz |
| | 12-24 VDC @ 400 mA |
| Channels | One |
| Recorder Display | 112 x 16 Graphical |
| Chart Rotation | User Selectable |
| Chart Range | 0 - 100% of Full Scale |
| Chart Size: | 100 mm Diameter |


| | |
|--------------------------|---|
| Recording Time | 24 Hour, 7 day, 31 day (user selectable) |
| Response Time | 4 sec. - 60 sec. (user selectable) |
| Calibration | Pen Arm |
| Relays | 3 SPDT (plug-in) 3 Amps |
| Chart Replacement Alarm | Flashing LED (Red) |
| Environmental protection | Nema 4, 4X |
| Temperature | Standard: -4° to 158°F (-20° to 70°C) |
| | With Heater: -40° to 158°F (-40° to 70°C) |

SPECIFICATIONS

Dimensions (inches/mm)

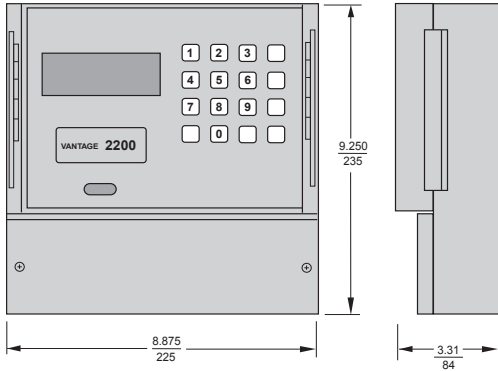


Wiring Schematic

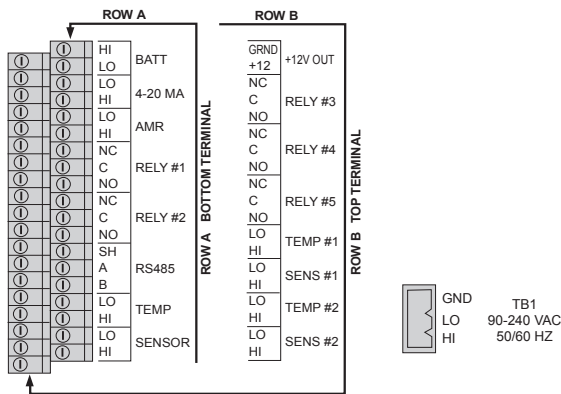

METER 18 MONTH WARRANTY

| ENCLOSURE | |
|--|--|
| Standard | IP66 / Nema 4X Polycarbonate Enclosure |
| Optional | Explosionproof, Aluminum Enclosure Class I, Grps. C & D, Class II, Grps. E, F, G, Div. 1 & 2 |
| Accessories | Heater and thermostat, Door Lock |
| TEMPERATURE | |
| Standard | -4° to 158°F (-20 to 70°C) |
| With Heater | -40° to 158°F (-40 to 70°C) |
| OUTPUTS | |
| (1) 4-20 mA (2210) | Analog isolated into 1000 ohms max, monitored to detect open circuits. RFI and gas discharge surge protection and two fuses. |
| (2) 4-20 mA (2220) | |
| Relay Alarms | Max. Five SPDT relays (pluggable) 0.25A @ 120 VAC or 0.50A @ 24 VDC |
| RS-232 Serial Port | 1200-38400 Baud, Modbus RTU (2210/2220) |
| RS-485 Serial Port | Optically isolated, Modbus RTU (2220) |
| Network Protocols | Modbus, Profibus or DeviceNet |
| DC Power Out | 12 VDC, 100mA maximum |
| DISPLAY | |
| Backlit LCD | 4 Line x 20 character (contrast control) |
| POWER | |
| Wattage | 4.8 |
| Voltage | 90/240 VAC, 50/60 Hz / 12-24VDC @ 200 mA. |
| DATA LOGGING | |
| Non-volatile flash memory, storage of up to 32768 records. | |

Dimensions (inches/mm)

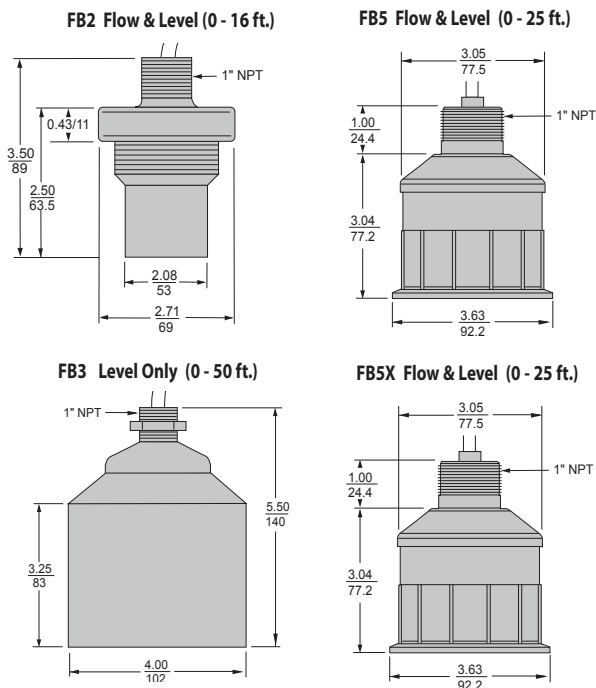

SENSORS 18 MONTH WARRANTY

| FB2 / FB5 / FB5X | |
|------------------|--|
| Applications | Flow, Level and Chemical Tanks |
| Certification | FM, Class I, Div. 1, Groups A, B, C, D (FB5X) |
| Sensor | Temperature compensated |
| Body & Topworks | (FB2) Tefzel® (FB5) Glass Filled Polyester |
| Span Range | FB2 - 0-16 feet max. w/ 12 inch min. offset FB5 - 0-25 feet max. w/ 12 inch min. offset |
| Temperature | -40° to 158°F (-40° to 70°C) |
| Mounting | 1" NPT nipple and 2" conn. threads (FB2 only) |
| Accuracy | ± 0.02" or ± 0.05% of target distance. |
| Cable | 30 feet |
| FB3 | |
| Applications | Level Measurement |
| Sensor | Temperature compensated. |
| Body & Face | Glass filled polyester epoxy |
| Span Range | 0-50 feet max. w/24 inch minimum offset |
| Temperature | -40° to 158°F (-40° to 70°C) |
| Mounting | 1" NPT nipple |
| Accuracy | ± 0.1" or ± 0.1% of span |
| Cable | 100 feet |

SUGGESTED SPECIFICATION

VANTAGE 2200

An ultrasonic microprocessor-based flow/level meter shall be installed at the location on the plans in accordance with the manufacturer's recommendation. The _____ (flow/level) meter shall be programmed for a _____ (size & type of primary element or tank type) and scale at maximum to _____ (max flow and engineering units or maximum level). The ultrasonic unit shall have the following features:

Enclosure: IP66/NEMA 4, 4X, (optional: Explosionproof, Class I, Groups C & D, Class II, Groups E, F & G, Divisions 1 & 2)

Power: 80/240 VAC, 50/60 Hz or 12-24 VDC @ 200 mA with surge suppression and fuse.

Outputs: 4-20 mA isolated into 1000 ohms, monitored to detect open circuits, with RFI and gas discharge surge protection and two fuses.

Relays: Five optional relays rated at 3.0A @ 120VAC/24VDC. The relays must be assignable by the front panel keypad for up to three setpoints, loss of signal, 4-20 loop, overrange 1, overrange 2, contact integrator or pump alternation.

Data Logger: There shall be a data logger integral to the electronics. The data logger shall have non-volatile flash memory with a storage capacity of 32768 records. Software shall be supplied for downloading the data. The logged data shall have the capability to be displayed on the backlit display in graphing form and totals for the past eight days.

RS-232: There shall be a RS-232 serial port of 1200-38400 baud, Modbus RTU protocol.

RS-485: There shall be a RS-485 serial port optically isolated, Modbus RTU protocol.

Electronics: The display for the electronics must be a four line, 20 character display with the ability to turn the display On or Off by the front panel keypad and also to adjust the contrast. The meter must employ a menu-driven programming style of data entry. All programming functions and data entry and collection shall be initiated by the display and the 16 button keypad. At least 78 flow curve calculations shall be stored in the firmware with the ability to produce special curves either via flow equations or head vs flow tables. The unit shall compute all flow calculations using IEEE 754 single floating point precision. Units using flow lookup tables for standard flume or weir equations shall not be permitted. The electronics shall be able to accept up to two separate sensors and display all functions for both channels.

Warranty: The electronics and sensor shall carry a 18 month warranty.

SENSORS

Flow/Level (0-16 ft) or (0-25 ft): The sensor shall be designed for flow or level. The sensor shall be made of Tefzel® or PVC and be supplied with 30 feet of cable. 1000 ft. maximum cable runs allowed. Splices shall be made waterproof. The maximum level range of the sensor shall be 16 feet or 25 feet.

Level (0-50 ft): The sensor shall be designed for levels up to a maximum of 50 ft. The sensor shall be made of glass filled polyester and be supplied with 100 ft. of cable. 300 ft. maximum cable runs allowed. Splices shall be made water proof.





Sensor Accuracy: The sensor shall be accurate to 0.02 inches or 0.05% of target distance.

The sensor cables shall be run in dedicated conduit.

The unit shall be a Model 2210/2220 as manufactured by Eastech, Tulsa OK or equal.

Ordering Guide

Please provide the following information: Size and type primary element: _____ Maximum flow: _____ Maximum level: _____

| Enclosure | Sensor | Extra Cable | Options | Data Retrieval | Manhole Flume |
|--|---|-------------|---------------------------------|-----------------------------------|--------------------|
| 2210 Nema 4, 4x, One 4-20mA, Data logger, RS232 Same-Day Shipment  | FB5A Flow/Level (0-25 ft) PVC (30' cable) | _____ ft. | Factory Calibrated A | Modem (phone line) M | 4" MF4 |
| 2220 Nema 4, 4x, Two 4-20mA, Data logger, RS232/485 Same-Day Shipment  | FB5X Flow/Level (0-45 ft) Polyester FM, Class I, Div. 1, All groups (50' cable) | | Heater & Thermostat B | Profibus E | 6" MF6 |
| 2207 Explosionproof, Class I, Groups C & D, Div.ision 1 & 2  | FB2A Flow/Level (0-16 ft) Tefzel (30' cable) | | Keylock C | DeviceNet F | 8" MF8 |
| CHART RECORDER 15 Nema 4,4X • IP66 Circular Chart (please specify) 1 Day • 7 Day • 31 Day  | FB3A Level (0-50 ft) Polyester (100' cable) | | Splice Kit D | | 10" MF10 |
| | | | Relay Kit* R | | 12" MF12 |

* Relays are not included as standard. Please specify amount required.

Ordering Example: Vantage 2210 with 0-25' sensor, factory calibration, heater and therm, 2 relays. **2210FB5AABR2**